

Fig. 1

XFS Service Provider Object Class  
Hierarchy  
(Depositor Example)

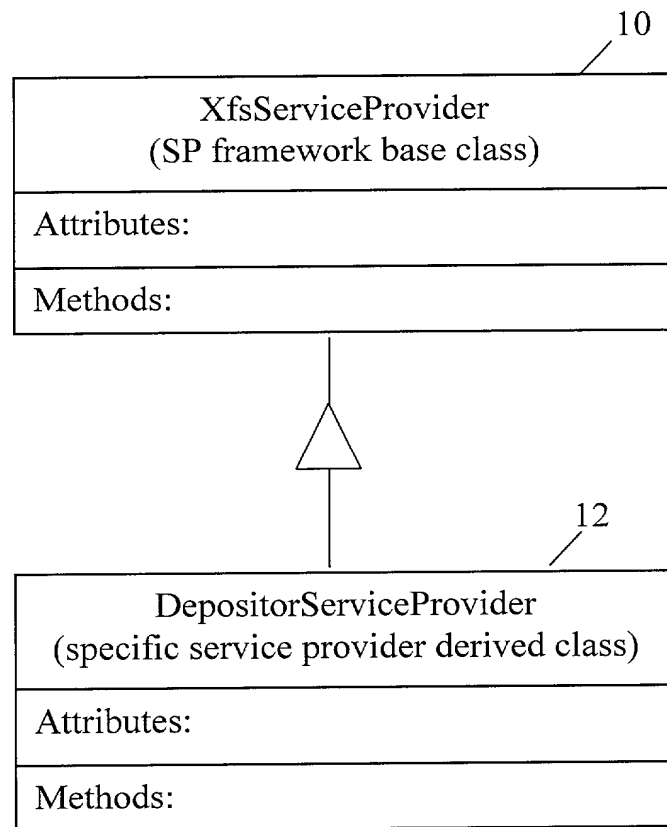


Fig. 2

Service Provider Request Object  
Class Hierarchy  
(WFPEXecute Example)

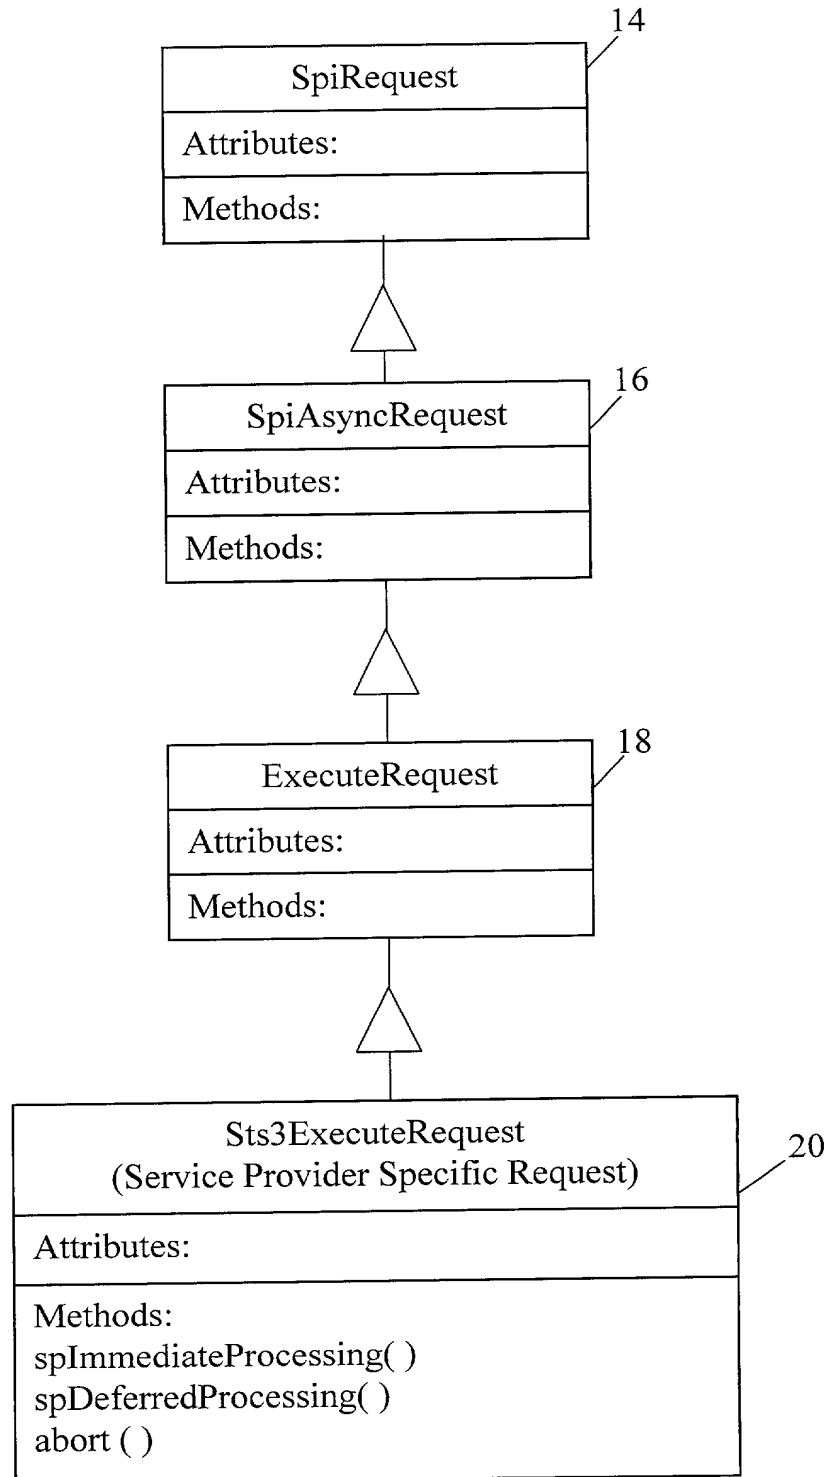


Fig. 3

<b>WFPCancelAsyncRequest Parameters</b>	<b>Variable Name of Access Function</b>
hService	HSERVICE getServiceHandle( )
reqID	REQUESTID getRequestID( )

Fig. 4

WFPClose Parameters	Variable Name of Access Function
hService	HSERVICE getServiceHandle( )
hWnd	HWND getRequestCompleteWindow( )
reqID	REQUESTID getRequestID( )

Fig. 5

<b>WFPDeregister Parameters</b>	<b>Variable Name of Access Function</b>
hService	HSERVICE getServiceHandle( )
dwEventClass	DWORD eventClass
hWndReg	HWND eventWnd
hWnd	HWND getRequestCompleteWindow( )
reqID	REQUESTID getRequestID( )

Fig. 6

<b>WFPEXecute Parameters</b>	<b>Variable Name of Access Function</b>
hService	HSERVICE getServiceHandle( )
dwCommand	DWORD CommandID
lpCommandData	LPVOID CommandData
dwTimeOut	DWORD getRequestTimeout( )
hWnd	HWND getRequestCompleteWindow( )
reqID	REQUESTID requestId( )

Fig. 7

<b>WFPEXecute Parameters</b>	<b>Variable Name of Access Function</b>
hService	HSERVICE getServiceHandle( )
dwCategory	DWORD infoCategory
IpQueryDetails	LPVOID queryDetails
dwTimeOut	DWORD getRequestTimeout( )
hWnd	HWND getRequestCompleteWindow( )
reqID	REQUESTID getRequestID( )

Fig. 8



<b>WFPOpen Parameters</b>	<b>Variable Name of Access Function</b>
hService	HSERVICE getServiceHandle( )
IpszLogicalName	LPSTR logicalName
hApp	HAPP applicationHandle
lpSzApplicationID	LPSTR applicationId
dwTraceLevel	DWORD tracelevel
dwTimeOut	DWORD getRequestTimeout( )
hWnd	HWND getRequestCompleteWindow( )
reqID	REQUESTID getRequestID( )
hProvider	HPROVIDER providerHandle
dwSPVersionsRequired	DWORD spiVersionsRequired
IpSPIVersion	LPWFSVERSION spiVersionInfo
dwSrvcVersionsRequired	DWORD srvcVersionsRequired
IpSrvcVersion	LPWFSVERSION srvcVersionInfo

Fig. 9

<b>WFPResister Parameters</b>	<b>Variable Name of Access Function</b>
hService	HSERVICE getServiceHandle( )
dwEventClass	DWORD eventClasss
hWndReg	HWND eventWnd
hWnd	HWND getRequestCompleteWindow()
reqID	REQUESTID getId( )

Fig. 10

<b>WFPSetTraceLevel Parameters</b>	<b>Variable Name of Access Function</b>
hService	HSERVICE getServiceHandle( )
dwTraceLevel	DWORD tracelevel

Fig. 11